
Soda organizer 2

Cut list and table-saw plan | 26 W x 18 1/8 D x 36 1/4 H in

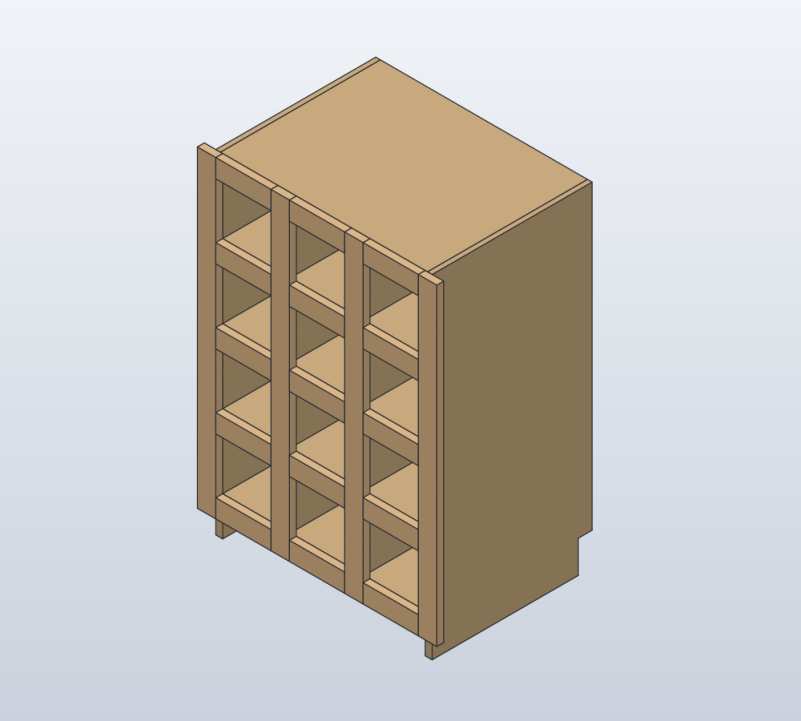

Stock for this layout

3/4 in maple plywood

1 full 48 x 96 in sheet

+ 1 offcut, 16 x 36 in

1/4 in maple plywood

1 offcut, 24 x 36 in

4/4 hard maple

3.62 board ft in rough blanks

Before defect and yield loss

Plywood blanks

Part	Qty	Along grain x across grain x thickness (in)
Sides	2	36 1/4 x 17 3/8 x 3/4
Dividers	2	31 3/4 x 16 5/8 x 3/4
Top and bottom	2	22 1/2 x 17 3/8 x 3/4
Outer-bay shelves	6	16 5/8 x 7 1/8 x 3/4
Center-bay shelves	3	16 5/8 x 7 3/4 x 3/4
Back	1	31 11/16 x 22 7/16 x 1/4

Measure stock before machining

The drawings use 0.750 in carcass stock and 0.250 in back stock.

Test-fit scrap in the dados and grooves. Regenerate if measured thickness changes.


The grain direction is marked on each sheet. A second full 3/4 in sheet can supply S2.

S1 | 3/4 in maple plywood

48 x 96 in stock | Grain along 96 in

Trim 1/4 in per edge. Keep the 1/8 in kerf on the waste side.

Rip the strips at the widths shown, then crosscut along each strip as drawn.

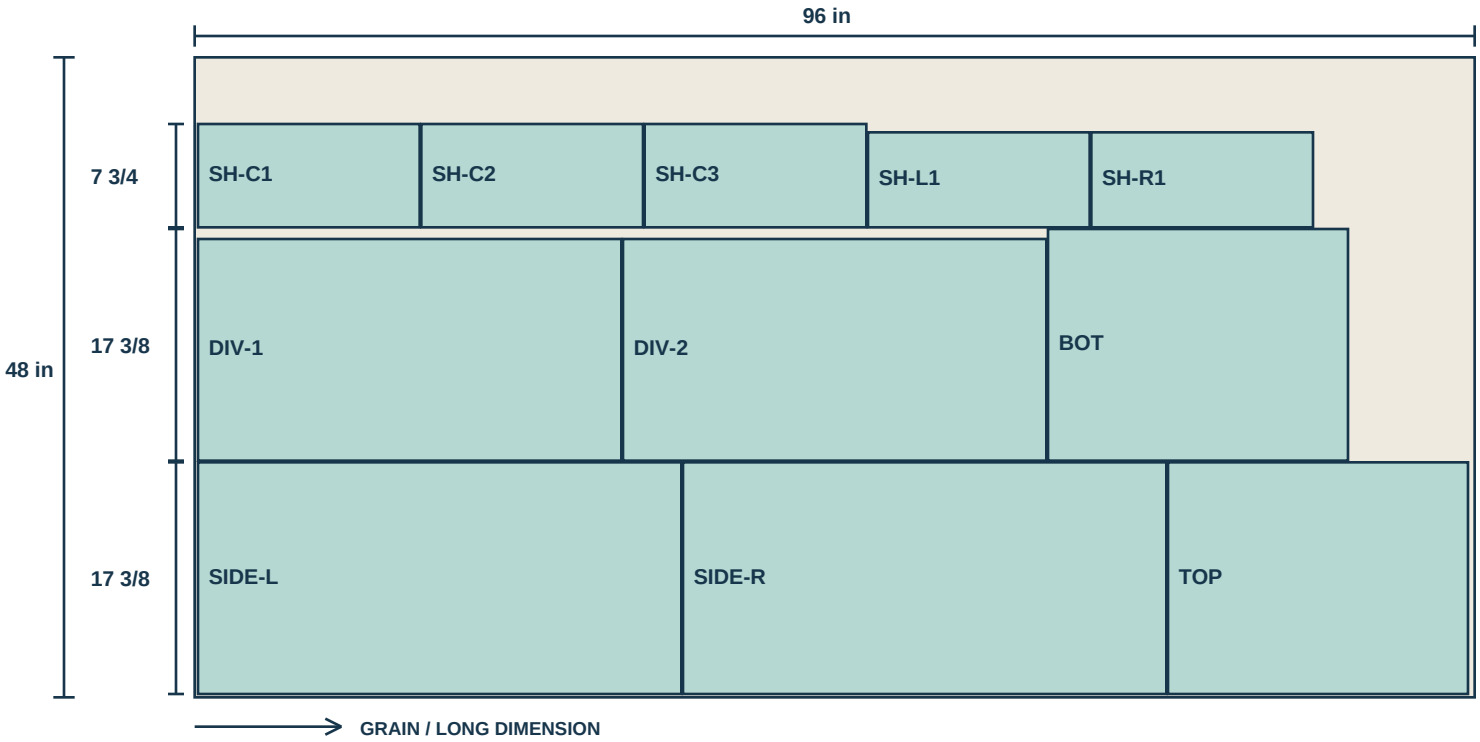

Rip width	Kept pieces	Final width x length (in)
17 3/8	SIDE-L, SIDE-R	17 3/8 x 36 1/4
	TOP	17 3/8 x 22 1/2
17 3/8	DIV-1, DIV-2	16 5/8 x 31 3/4
	BOT	17 3/8 x 22 1/2
7 3/4	SH-C1, SH-C2, SH-C3	7 3/4 x 16 5/8
	SH-L1, SH-R1	7 1/8 x 16 5/8


If final width is smaller than the rip width, crosscut the blank first, then narrow it.

S2 | 3/4 in maple plywood

16 x 36 in stock | Grain along 36 in

Trim 1/4 in per edge. Keep the 1/8 in kerf on the waste side.

Rip the strips at the widths shown, then crosscut along each strip as drawn.

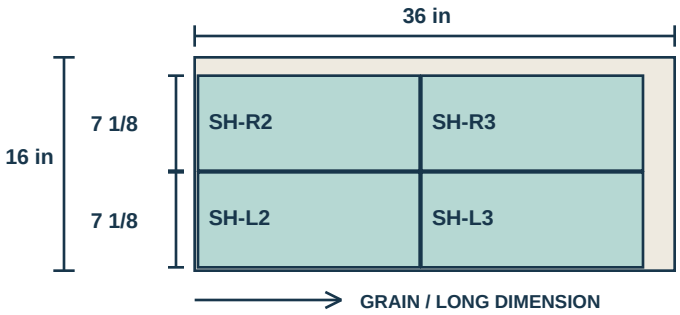

Rip width	Kept pieces	Final width x length (in)
7 1/8	SH-L2, SH-L3	7 1/8 x 16 5/8
7 1/8	SH-R2, SH-R3	7 1/8 x 16 5/8


If final width is smaller than the rip width, crosscut the blank first, then narrow it.

S3 | 1/4 in maple plywood

24 x 36 in stock | Grain along 36 in

Trim 1/4 in per edge. Keep the 1/8 in kerf on the waste side.

Rip the strips at the widths shown, then crosscut along each strip as drawn.

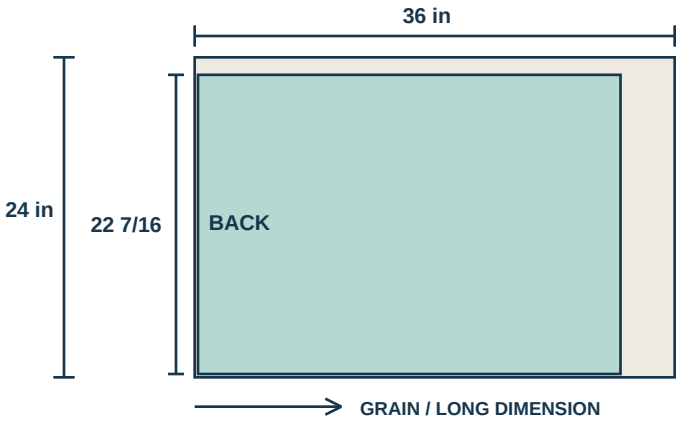

Rip width	Kept pieces	Final width x length (in)
22 7/16	BACK	22 7/16 x 31 11/16

If final width is smaller than the rip width, crosscut the blank first, then narrow it.

Hard maple and joinery

4/4 rough stock | Mill to 3/4 in finished thickness

Part	Qty	Finished L x W (in)	Rough L x W (in)
Stile	4	34 x 2	35 x 2 1/8
Rail	15	6 x 2	7 x 2 1/8

3.62 board ft of rough blanks at 1 in nominal thickness. Board yield depends on your stock.

See the next page for the default board layout. Use the HTML planner for measured stock.

Face frame uses glued, pocket-screwed butt joints. Check screw placement on scrap.

Joinery drawings

See the following pages for machining faces, edge references and cut depths.

Dry-fit the shelf-and-divider core on the bottom, seat the back, then fit the top.

Bring in the outer sides and check square before fitting the face frame.


4/4 hardwood cut plan

Hard maple | 2 boards at 6 x 96 in usable

Kerf: 1/8 in. Square one end and straighten one edge before measuring usable stock.

Rip the strips first, then crosscut left to right. Dimensions shown are rough blanks.

Board B1




Strip 1 | Rip 2 1/8 in ST-1 / ST-2 / RA-11 / RA-12 / RA-13

Crosscut lengths (in) 35 + 35 + 7 + 7 + 7

Strip 2 | Rip 2 1/8 in ST-3 / ST-4 / RA-21 / RA-22 / RA-23

Crosscut lengths (in) 35 + 35 + 7 + 7 + 7

Board B2





Strip 1 | Rip 2 1/8 in RA-31 / RA-32 / RA-33 / RA-41 / RA-42 / RA-43 / RA-51 / RA-52 / RA-53

Crosscut lengths (in) 7 + 7 + 7 + 7 + 7 + 7 + 7 + 7 + 7

Joinery | SIDE-L

Sides / Qty 1 each hand / 3/4 in maple plywood

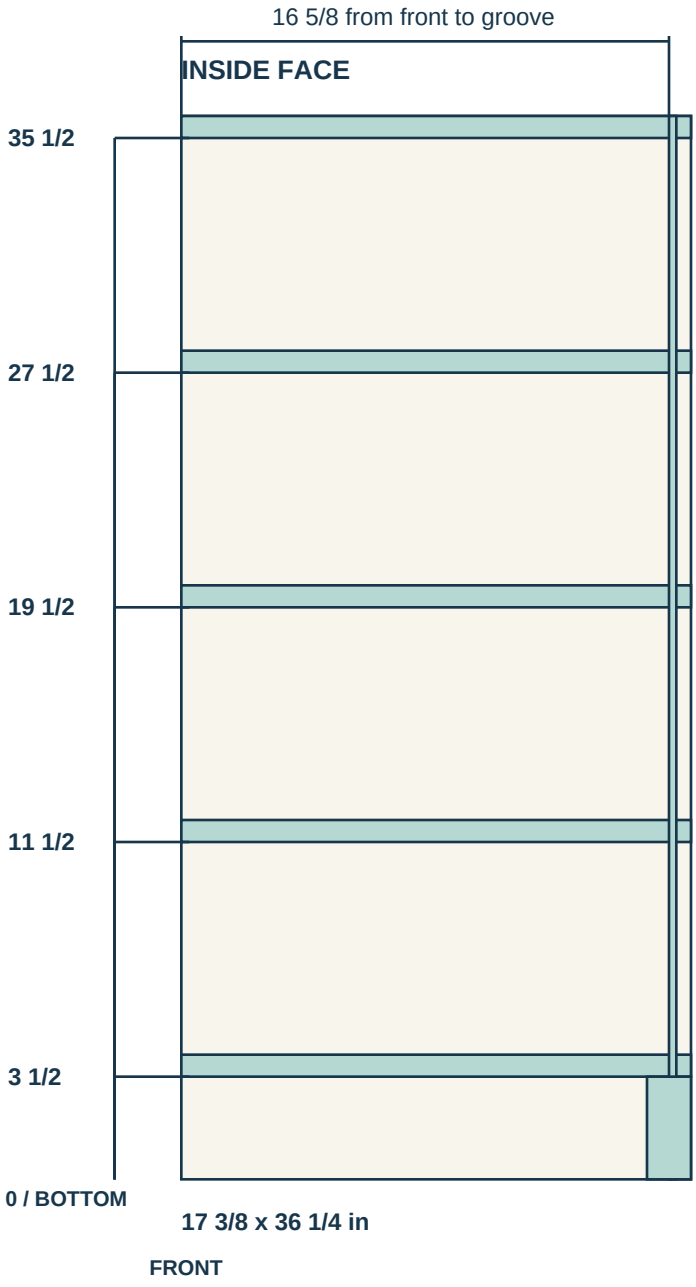

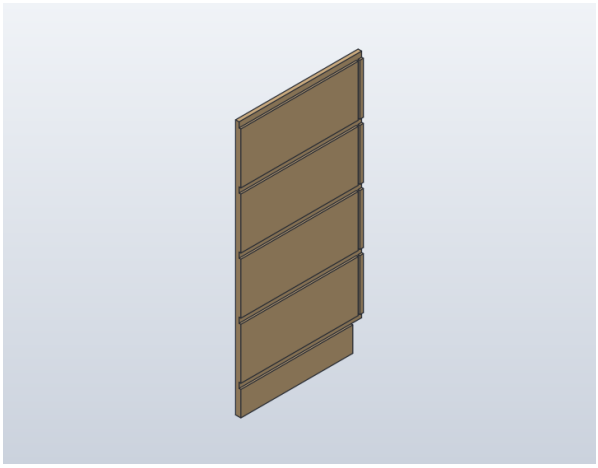

Shelf dados: 3/4 in wide x 1/4 in deep.

Back groove: 1/4 in wide x 1/4 in deep.


Run the dados and back groove through.


Rear-bottom relief: 1 1/2 in x 3 1/2 in, through.

Bottom is the common datum for all five shelf dado starts.

Joinery | SIDE-R

Sides / Qty 1 each hand / 3/4 in maple plywood

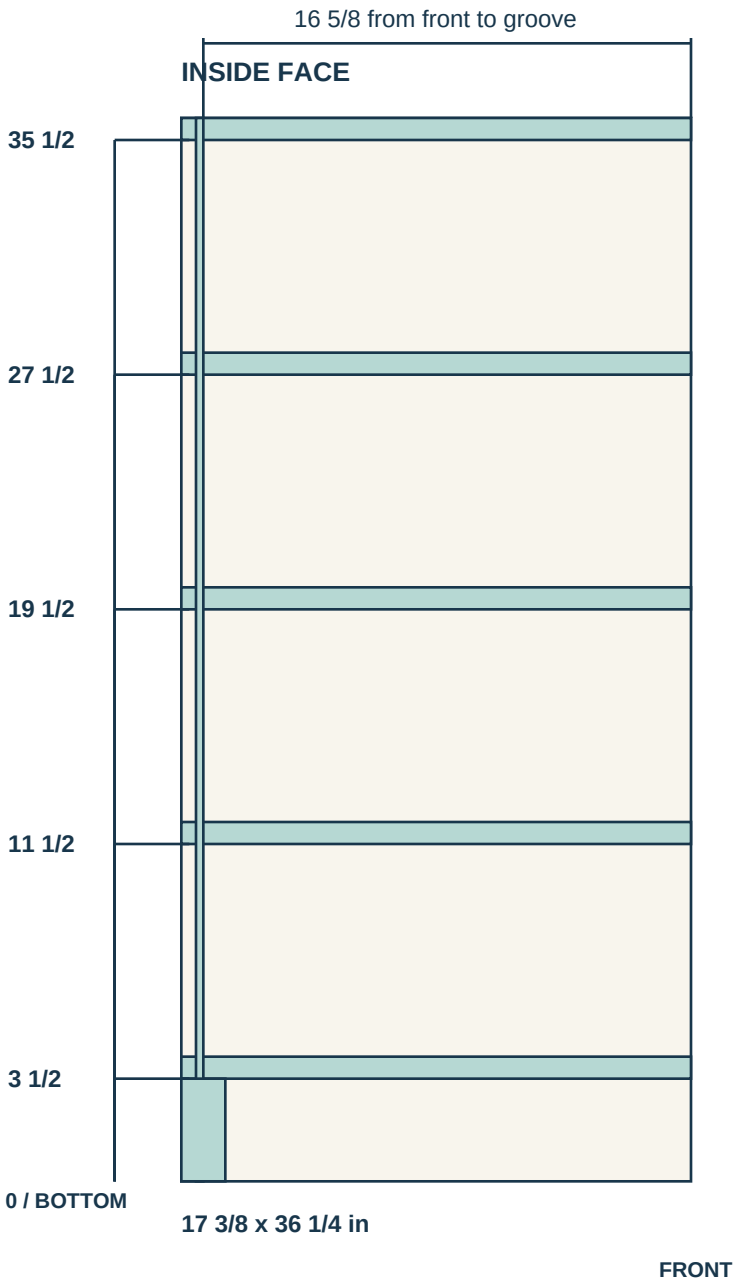

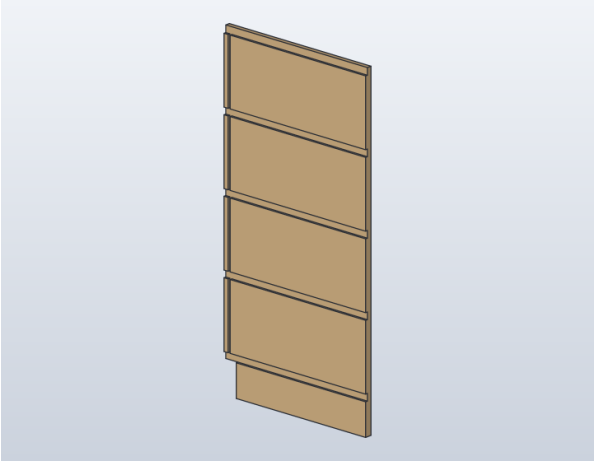

Shelf dados: 3/4 in wide x 1/4 in deep.

Back groove: 1/4 in wide x 1/4 in deep.


Run the dados and back groove through.


Rear-bottom relief: 1 1/2 in x 3 1/2 in, through.

Bottom is the common datum for all five shelf dado starts.

Joinery | DIV-1 and DIV-2

Dividers / Qty 2 / 3/4 in maple plywood

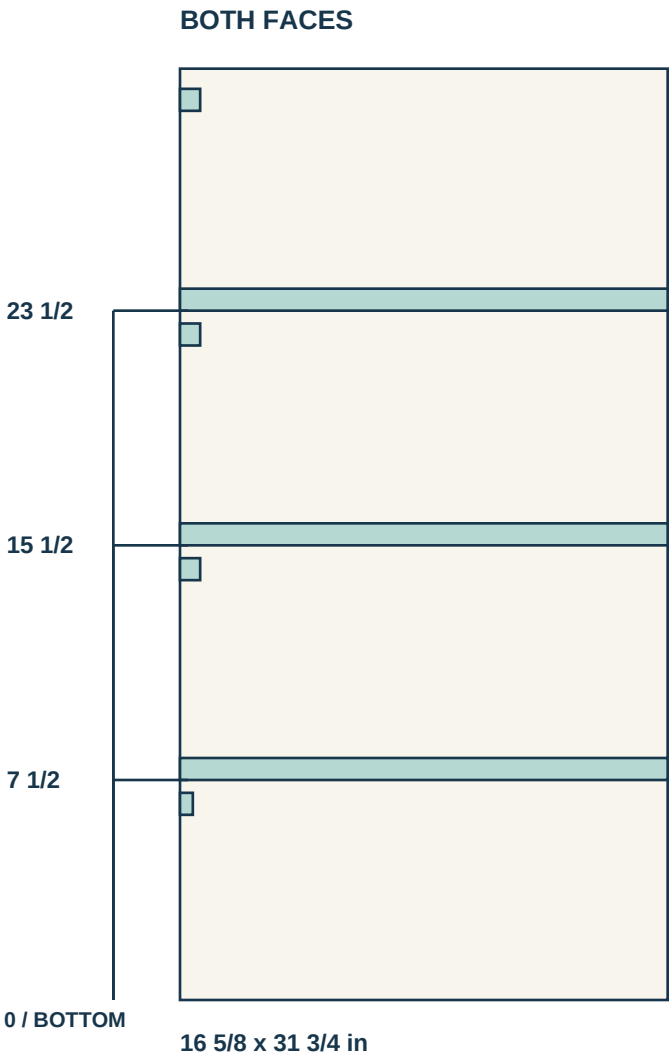

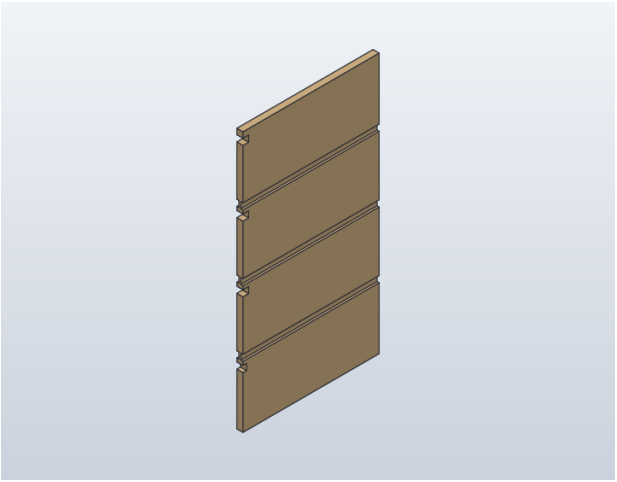

Dados: 3/4 in wide x 1/4 in deep.

Run through from front to rear.

Repeat the pattern on the opposite face.

Opposing dados leave a 1/4 in web.

Channel reliefs: 3/4 in high, through thickness.


Depth from front: 7/16 in lowest, 11/16 in others.


Lower edges from divider bottom (in):

6 5/16, 14 5/16, 22 5/16, 30 5/16

Joinery | TOP and BOT

Top and bottom / Qty 2 / 3/4 in maple plywood

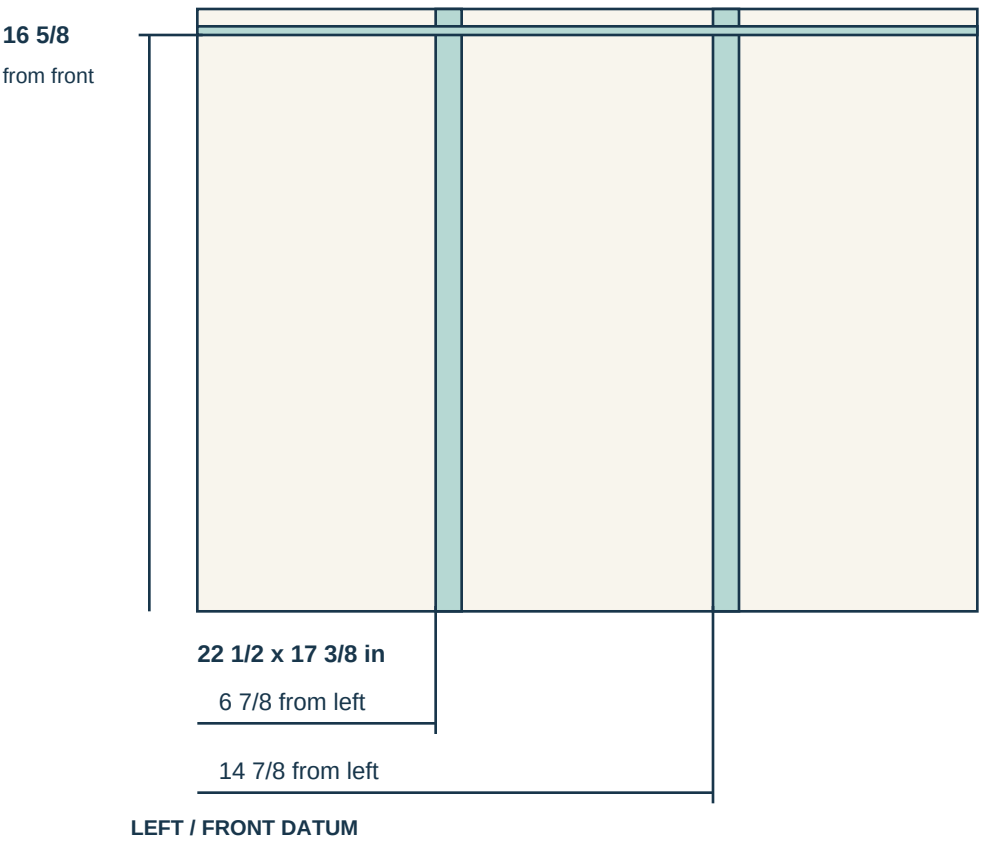

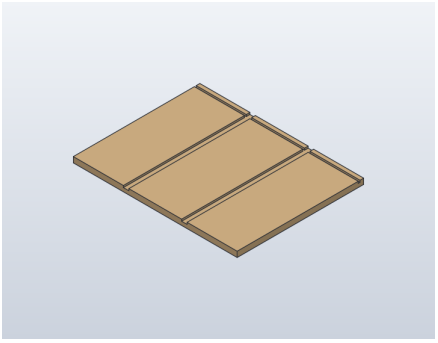

Divider dados: 3/4 in wide x 1/4 in deep. Run front to rear.

Back groove: 1/4 in wide x 1/4 in deep. Run left to right.

Machine the top underside and the bottom upper face with this same pattern.

Joinery | Shelves and back


Maple plywood / Square edges seat in the carcass recesses

Outer-bay shelves / SH-L1 to L3 and SH-R1 to R3 / Qty 6




3/4 in thick

16 5/8 x 7 1/8 in

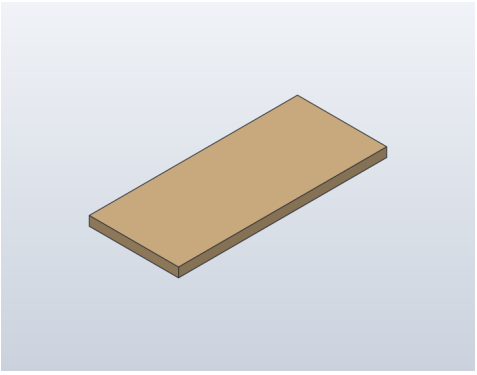


Center-bay shelves / SH-C1 to C3 / Qty 3




3/4 in thick

16 5/8 x 7 3/4 in

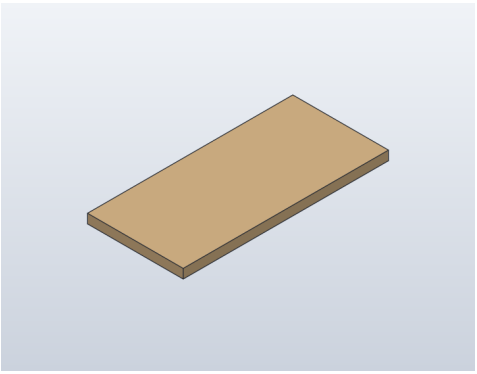


Back / BACK / Qty 1




1/4 in thick

22 7/16 x 31 11/16 in

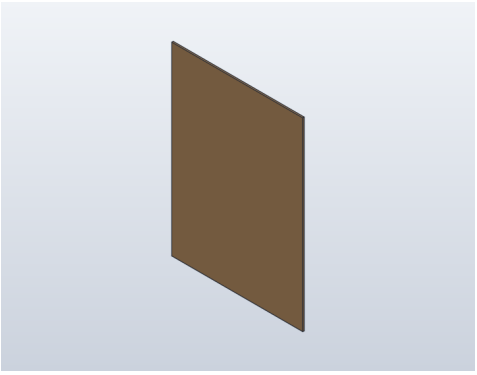


Joinery | Hardwood face frame


4/4 hard maple / 3/4 in finished thickness

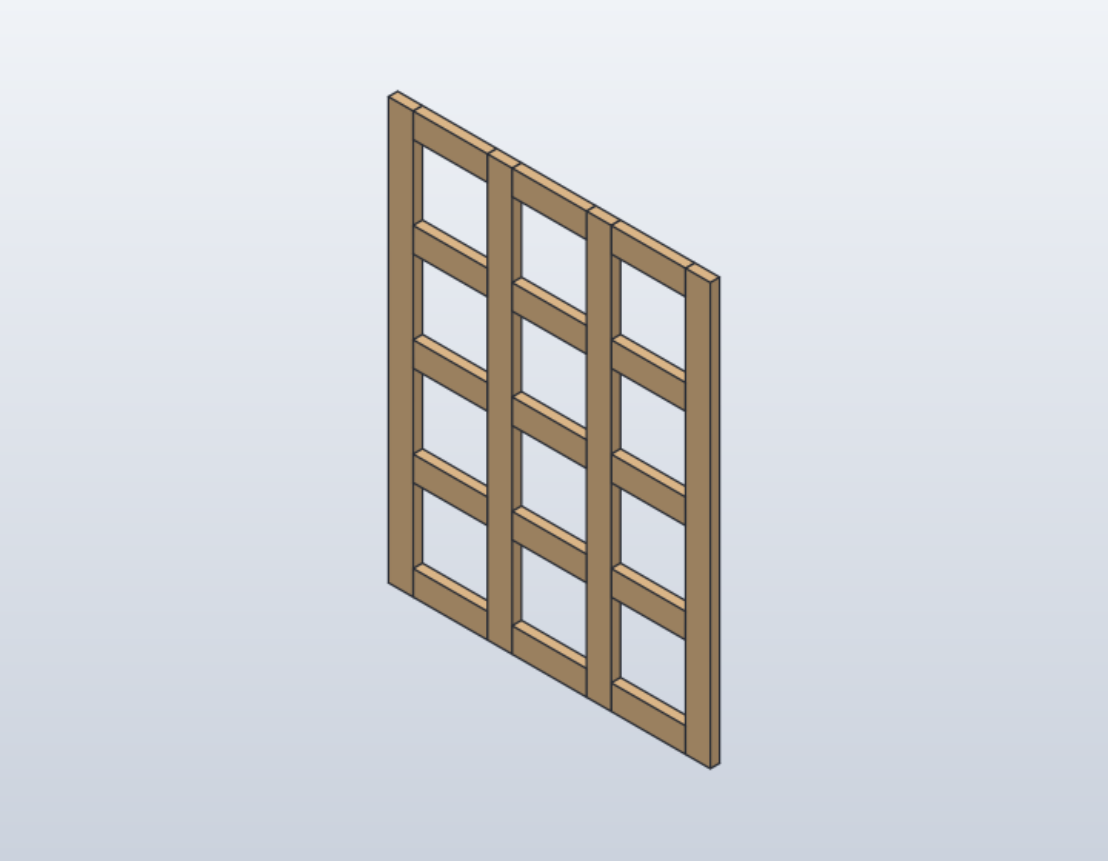

Stiles / ST-1 to ST-4 / Qty 4 / 34 x 2 x 3/4 in

Rails / RA-11 to RA-53 / Qty 15 / 6 x 2 x 3/4 in

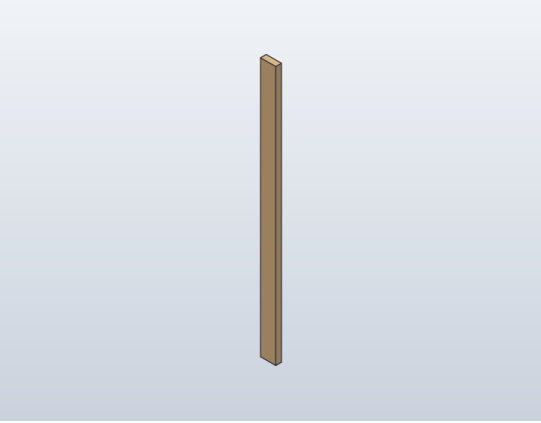

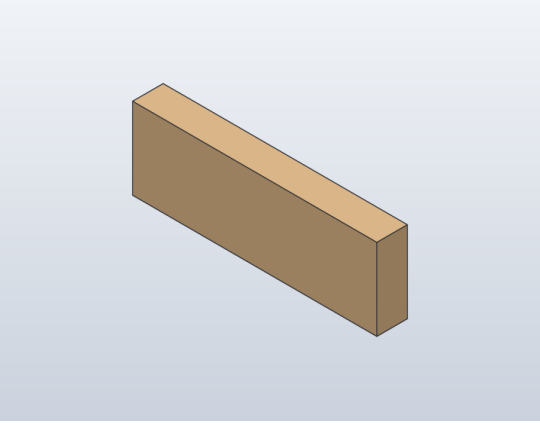

Glue and pocket-screw the square-ended butt joints from the rear face.

Set the hole offsets and drill depth using your jig and screw specifications.

Soda organizer lighting

R5 | Four rear-mounted continuous channels

Cut three 21 3/4 in angled runs (65 1/4 in total) from the 72 in stock.

Mount angled runs behind rows 3, 4 and 5, counted from the bottom.

Cut one 21 3/4 in rectangular run for row 2, with its light facing the back.

Each run spans all three columns. Mount 1/8 in above the rail lower edge.

Cut four front-edge reliefs through each inner divider.

Test the 11/16 in angled and 7/16 in rectangular relief depths with actual profiles.

Feed each row from the side or rear with accessible connections.

Outside-face shelf pins

Transfer the shared level datum from the side bays. Use two rows per organizer side.

Check 1/8 in pins and insertion depth against the actual hardware.

At dado and groove crossings, nominal wall thickness remaining is 1/2 in.

See the side-bay packet for provisional pin locations and drilling limits.